


DIN 2631 - 238 WN Flanges PN10



DIN 2631 - 2638 WN Flanges PN 10													
Nom.O D	D0 [mm]	D1 [mm]	D2 [mm]	D3 [mm]	D4 [mm]	D5 [mm]	D6 [mm]	H0 [mm]	H1 [mm]	H2 [mm]	No.bolt s	Weigh t [kg]	Note s
8.00	340.0	207.3	219.1	235.0	268.0	295.0	22.0	3.0	24.0	62.0	8	11.3	DIN 2632
10.00	395.0	260.4	273.0	292.0	320.0	350.0	22.0	3.0	26.0	68.0	12	14.7	DIN 2632
12.00	445.0	309.7	323.9	344.0	370.0	400.0	22.0	4.0	26.0	68.0	12	17.4	DIN 2632
14.00	505.0	341.4	335.6	385.0	430.0	460.0	22.0	4.0	26.0	68.0	16	23.6	DIN 2632
16.00	565.0	392.2	406.4	440.0	482.0	515.0	26.0	4.0	26.0	72.0	16	28.6	DIN 2632
20.00	670.0	493.8	508.0	542.0	585.0	620.0	26.0	4.0	28.0	75.0	20	38.1	DIN 2632
24.00	780.0	595.8	610.0	642.0	685.0	725.0	30.0	5.0	28.0	80.0	20	44.6	DIN 2632
28.00	895.0	695.0	711.0	745.0	800.0	840.0	30.0	5.0	30.0	80.0	24	62.4	DIN 2632
32.00	1015. 0	797.0	813.0	850.0	905.0	950.0	33.0	5.0	32.0	90.0	24	84.1	DIN 2632
36.00	1115. 0	894.0	914.0	950.0	1005. 0	1050. 0	33.0	5.0	34.0	95.0	28	98.5	DIN 2632
40.00	1230. 0	996.0	1016. 0	1052. 0	1110. 0	1160. 0	36.0	5.0	34.0	95.0	28	115.0	DIN 2632
48.00	1455. 0	1198. 0	1220. 0	1255. 0	1330. 0	1380. 0	39.0	5.0	38.0	115. 0	32	182.0	DIN 2632
56.00	1675. 0	1396. 0	1420. 0	1460. 0	1535. 0	1590. 0	42.0	5.0	42.0	120. 0	36	248.0	DIN 2632

64.00	1915. 0	1592. 0	1620. 0	1665. 0	1760. 0	1820. 0	48.0	5.0	46.0	130. 0	40	347.0	DIN 2632
72.00	2115. 0	1790. 0	1820. 0	1868. 0	1960. 0	2020. 0	48.0	5.0	50.0	140. 0	44	430.0	DIN 2632
80.00	2325. 0	1988. 0	2020. 0	2072. 0	2170. 0	2230. 0	48.0	5.0	54.0	150. 0	48	539.0	DIN 2632
88.00	2550. 0	2184. 0	2220. 0	2275. 0	2370. 0	2440. 0	56.0	6.0	58.0	160. 0	52	658.0	DIN 2632
96.00	2760. 0	2380. 0	2420. 0	2478. 0	2570. 0	2650. 0	56.0	6.0	62.0	170. 0	56	825.0	DIN 2632
104.00	2960. 0	2576. 0	2620. 0	2680. 0	2780. 0	2850. 0	56.0	6.0	66.0	180. 0	60	979.0	DIN 2632
112.00	3180. 0	2776. 0	2820. 0	2882. 0	3000. 0	3070. 0	56.0	6.0	70.0	190. 0	64	1156.0	DIN 2632
120.00	3405. 0	2972. 0	3020. 0	3085. 0	3210. 0	3290. 0	62.0	6.0	75.0	200. 0	68	1402.0	DIN 2632

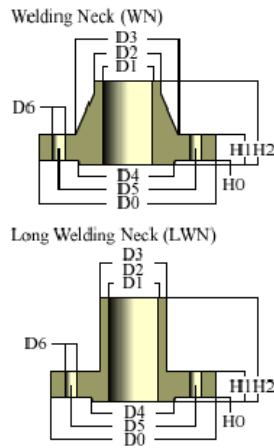