


DIN 2631 - 2638 WN Flanges - PN40



| DIN 2631 - 2638 WN Flanges PN 40 | | | | | | | | | | | | | |
|-------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|----------|----------------|----------|
| Nom.OD | D0 [mm] | D1 [mm] | D2 [mm] | D3 [mm] | D4 [mm] | D5 [mm] | D6 [mm] | H0 [mm] | H1 [mm] | H2 [mm] | No.bolts | Weight [kg] | Notes |
| 0.38 | 90.0 | 13.6 | 17.2 | 28.0 | 40.0 | 60.0 | 14.0 | 2.0 | 16.0 | 35.0 | 4 | 0.7 | DIN 2635 |
| 0.50 | 95.0 | 17.3 | 21.3 | 32.0 | 45.0 | 65.0 | 14.0 | 2.0 | 16.0 | 38.0 | 4 | 0.7 | DIN 2635 |
| 0.75 | 105.0 | 22.3 | 26.9 | 40.0 | 58.0 | 75.0 | 14.0 | 2.0 | 18.0 | 40.0 | 4 | 1.1 | DIN 2635 |
| 1.00 | 115.0 | 28.5 | 33.7 | 46.0 | 68.0 | 85.0 | 14.0 | 2.0 | 18.0 | 40.0 | 4 | 1.3 | DIN 2635 |
| 1.25 | 140.0 | 37.2 | 42.4 | 56.0 | 78.0 | 100.0 | 18.0 | 2.0 | 18.0 | 42.0 | 4 | 1.9 | DIN 2635 |
| 1.50 | 150.0 | 43.1 | 48.3 | 64.0 | 88.0 | 110.0 | 18.0 | 3.0 | 18.0 | 45.0 | 4 | 2.3 | DIN 2635 |
| 2.00 | 165.0 | 55.1 | 60.3 | 75.0 | 102.0 | 125.0 | 18.0 | 3.0 | 20.0 | 48.0 | 4 | 2.8 | DIN 2635 |
| 2.50 | 185.0 | 70.3 | 76.1 | 90.0 | 122.0 | 145.0 | 18.0 | 3.0 | 22.0 | 52.0 | 8 | 3.7 | DIN 2635 |
| 3.00 | 200.0 | 82.5 | 88.9 | 105.0 | 138.0 | 160.0 | 18.0 | 3.0 | 24.0 | 58.0 | 8 | 4.8 | DIN 2635 |
| 4.00 | 235.0 | 107.1 | 114.3 | 134.0 | 162.0 | 190.0 | 22.0 | 3.0 | 24.0 | 65.0 | 8 | 6.5 | DIN 2635 |
| 5.00 | 270.0 | 131.7 | 139.7 | 162.0 | 188.0 | 220.0 | 26.0 | 3.0 | 26.0 | 68.0 | 8 | 9.1 | DIN 2635 |
| 6.00 | 300.0 | 159.3 | 168.3 | 192.0 | 218.0 | 250.0 | 26.0 | 3.0 | 28.0 | 75.0 | 8 | 11.8 | DIN 2635 |
| 7.00 | 350.0 | 182.5 | 193.7 | 218.0 | 260.0 | 295.0 | 30.0 | 3.0 | 32.0 | 82.0 | 12 | 18.2 | DIN |

| | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|------|-----|------|-------|----|-------|-------------|
| | | | | | | | | | | | | | 2635 |
| 8.00 | 375.0 | 204.9 | 219.1 | 244.0 | 285.0 | 320.0 | 30.0 | 3.0 | 34.0 | 88.0 | 12 | 21.5 | DIN 2635 |
| 10.00 | 450.0 | 257.0 | 273.0 | 306.0 | 345.0 | 385.0 | 33.0 | 3.0 | 38.0 | 105.0 | 12 | 34.9 | DIN 2635 |
| 12.00 | 515.0 | 307.9 | 323.9 | 362.0 | 410.0 | 450.0 | 33.0 | 4.0 | 42.0 | 115.0 | 16 | 49.7 | DIN 2635 |
| 14.00 | 580.0 | 338.0 | 355.6 | 408.0 | 465.0 | 510.0 | 36.0 | 4.0 | 46.0 | 125.0 | 16 | 68.1 | DIN 2635 |
| 16.00 | 660.0 | 384.4 | 406.4 | 462.0 | 535.0 | 585.0 | 39.0 | 4.0 | 50.0 | 135.0 | 16 | 96.5 | DIN 2635 |
| 20.00 | 755.0 | 479.6 | 508.0 | 562.0 | 615.0 | 670.0 | 42.0 | 4.0 | 52.0 | 140.0 | 20 | 117.0 | DIN 2635 |

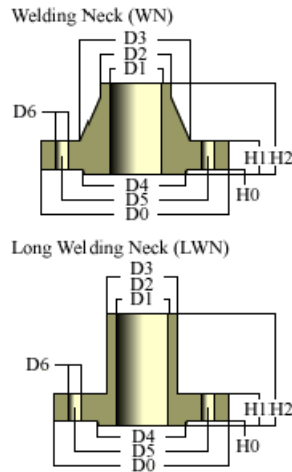