


JIS B2220 - 1984 (KSB1503 - 1985) 5KG / CM2

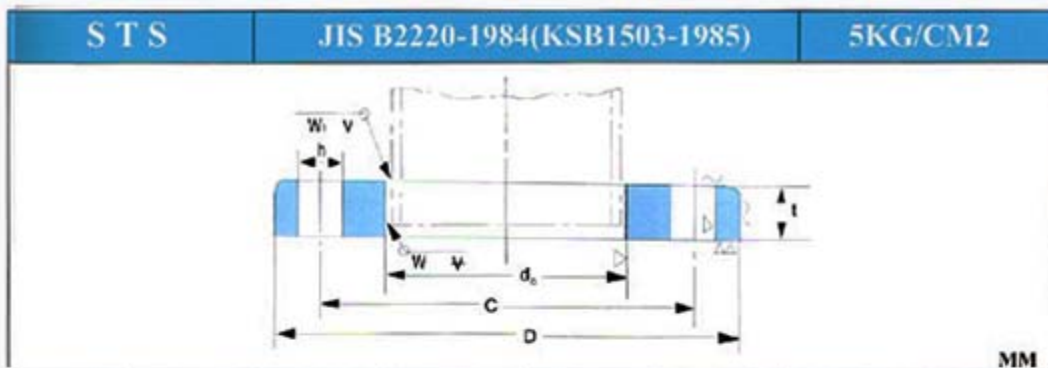

MM

size	outside dia.	inside dia.	thickness	bolt hole circle	bolt hole dia.	bolt hole	appro. weight
DN	D	d0	t	C	h	No.	kg
15	80	22.2	9	60	12	4	0.3
20	85	27.7	10	65	12	4	0.37
25	95	34.5	10	75	12	4	0.45
32	115	43.2	12	90	15	4	0.78
40	120	49.1	12	95	15	4	0.83
50	130	61.1	14	105	15	4	1.07
65	155	77.1	14	130	15	4	1.49
80	180	90	14	145	19	4	1.99
90	190	102.6	14	155	19	4	2.09
100	200	115.4	16	165	19	8	2.39
125	235	141.2	16	200	19	8	3.23
150	265	166.6	18	230	19	8	4.41
175	300	192.1	18	260	23	8	5.51
200	320	218	20	280	23	8	6.33
225	345	243.7	20	305	23	12	6.64
250	385	269.5	22	345	23	12	9.45
300	430	321	22	390	23	12	10.3
350	480	358.1	24	435	25	12	14
400	540	409	24	495	25	16	16.9
450	605	460	24	555	25	16	21.6
500	655	511	24	605	25	20	23.1
550	720	562	26	665	27	20	30.3
600	770	613	26	715	27	20	32.7
650	825	664	26	770	27	24	35.9
700	875	715	26	820	27	24	38.2
750	945	766	28	880	33	24	48.7
800	995	817	28	930	33	24	
850	1045	868	28	980	33	24	
900	1095	919	30	1030	33	24	
1000	1195	1021	32	1130	33	28	