


# JIS B2220 - 1984 (KSB1503 - 1985) 10KG/CM<sup>2</sup>

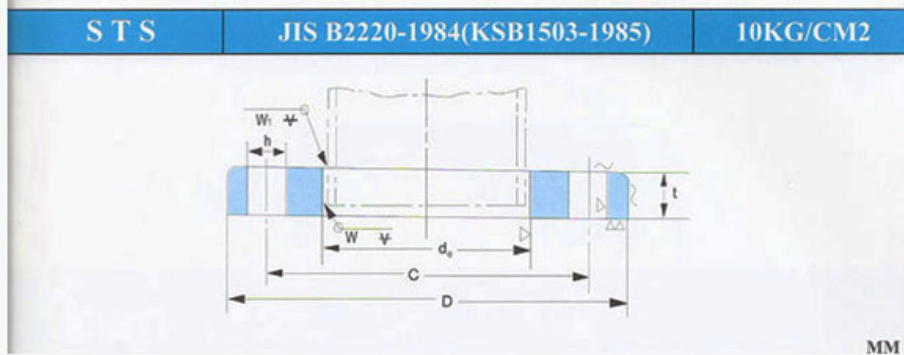

DN	D	d0	t	C	h	bolt hole No.	appro. weight kg
15	95	22.2	12	70	15	4	0.57
20	100	27.7	14	75	15	4	0.73
25	125	34.5	14	90	19	4	1.13
32	135	43.2	16	100	19	4	1.48
40	140	49.1	16	105	19	4	1.56
50	155	61.1	16	120	19	4	1.88
65	175	77.1	18	140	19	4	2.6
80	185	90	18	150	19	8	2.61
90	195	102.6	18	160	19	8	2.76
100	210	115.4	18	175	19	8	3.14
125	250	141.2	20	210	23	8	4.77
150	280	166.6	22	240	23	8	6.34
175	305	192.1	22	265	23	12	6.82
200	330	218	22	290	23	12	7.53
225	350	243.7	22	310	23	12	7.74
250	400	269.5	24	355	25	12	11.8
300	445	321	26	400	25	16	13.6
350	490	358.1	26	445	25	16	16.4
400	560	409	28	510	27	16	23
450	620	460	30	565	27	20	29.5
80	185	90	18	150	19	8	2.61
90	195	102.6	18	160	19	8	2.76
100	210	115.4	18	175	19	8	3.14
125	250	141.2	20	210	23	8	4.77
150	280	166.6	22	240	23	8	6.34
175	305	192.1	22	265	23	12	6.82
200	330	218	22	290	23	12	7.53
225	350	243.7	22	310	23	12	7.74
250	400	269.5	24	355	25	12	11.8
300	445	321	26	400	25	16	13.6
350	490	358.1	26	445	25	16	16.4
400	560	409	28	510	27	16	23
450	620	460	30	565	27	20	29.5
500	675	511	30	620	27	20	33.5
550	745	562	32	680	33	20	43.1
600	795	613	32	730	33	24	45.7
650	845	664	34	780	33	24	52.1
700	905	715	34	840	33	24	59.5
750	970	766	36	900	33	24	73.2
800	1020	817	36	950	33	28	
850	1070	868	36	1000	33	28	
900	1120	919	38	1050	33	28	
1000	1235	1021	40	1160	39	28	